

# K-LINE

## K-SUPPLY

Power supply for K-Line modules

K-LINE

Accessories



INGENIEROS ASOCIADOS DE CONTROL, S.L.


Avda. Manoteras, 22 - planta 3ª, nave 108  
28050 MADRID

Tif. 34 91.383.13.90 - Fax. 34 91.383.12.33  
[www.iac-sl.es](http://www.iac-sl.es) // [comercial@iac-sl.es](mailto:comercial@iac-sl.es)

- ▶ Redundant power supply
- ▶ Built-in over-voltage (surge) protection
- ▶ Able to supply up to 75 K-line modules
- ▶ Power supply source to be used for more than one K-Supply module
- ▶ Bridging power supply through the din rail bus connector (K-Bus)
- ▶ Tiny dimensions (102,5 x 93,1 x 6,2 mm)

## TECHNICAL DATA

### K-SUPPLY – Power supply for K-Line modules

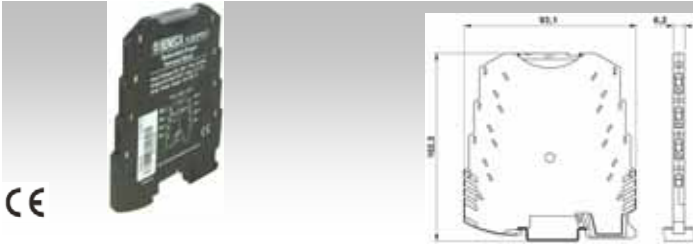

### ORDER CODES

K-SUPPLY	Power Supply module with surge protection
K-BUS	Expandable power supply connector


### GENERAL FEATURES

Power supply	19,2...30 Vdc
Power consumption	Max 5 mA per input
Current capacity	- Max 1,6 A with one single input - Max 2 A with in 1 and in 2 connected in parallel
IP Protection	IP 20


Design	Terminal housing for mounting on 35 mm DIN 46277
Dimensions	6,2 x 93,1 x 102,5 mm (w x h x d)
Weight	50 g
Operating temperature	-20...+65 °C
Connections	Plug-in screw clamp terminal blocks, wires up to 2.5 mm <sup>2</sup>
Standards	EN50081-2 EN50082-2 EN61010-1 EN60742
Approvals	CE

## DIMENSIONS AND INSTALLATION


### Inserting / Extracting module on DIN guide

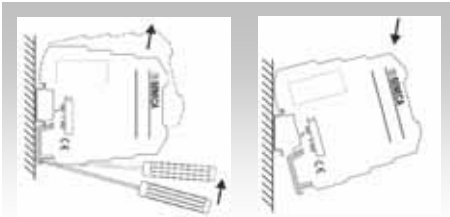


### Expandable connector K-BUS

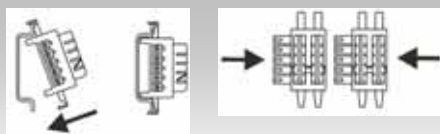


### Cage clamp connection

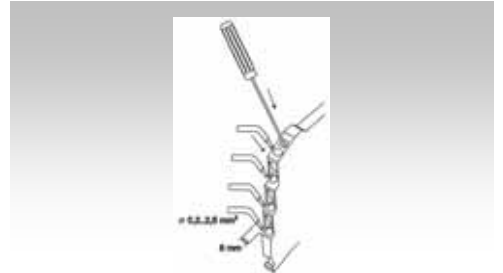


### Example of connection with redundant power supply

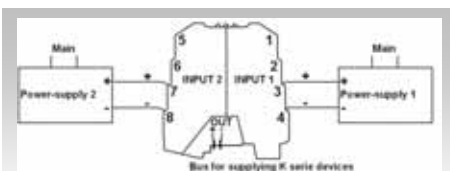

### Example of connection to more than one bus

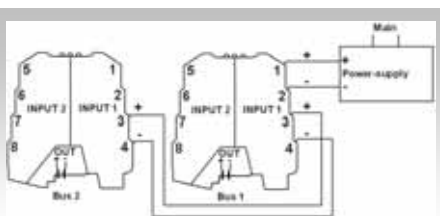

### Example of connection with inputs connected in parallel: 2A output

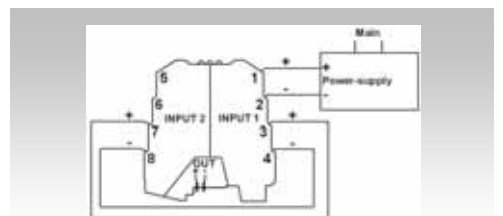

### Internal wiring

