

### Electronic Temperature Measurement

Standard • Model T42.10.000

 - class protection EEx ia • Model T42.10.002  
 - class protection EEx ib • Model T42.10.004

- Field bus protocol PROFIBUS PA
- Configurable for connection to
  - RTDs
  - Thermocouples
  - Resistance-sensor
  - mV-sensor
- Customer specific linearisation with max. 30 points for sensors with  $\Omega$ - or mV-output
-  class protection, intrinsically safe per FISCO-Model
  - II 1 G EEx ia IIB/IIC T4/T5/T6
  - II 2 G EEx ib IIB/IIC T4/T5/T6
- EMC Conformity per
  - DIN EN 50 081-1
  - DIN EN 50 082-2
  - NAMUR NE 21
- Isolation voltage AC 1500 V between sensor and bus
- 100% Rh protection, moisture condensation permissible
- Increased ambient temperature
- Configurable via e.g. SIMATIC PDM or Freelance 2000
- Terminal connections with captive screws
- CE-Conformity



### Description

The digital temperature transmitter T42 range is designed for universal use in the process industry. The Profibus technology makes it possible to operate up to seven transmitters in parallel on one Profibus PA string via one segment coupler (ex class protection) in hazardous areas. For applications without requirements on the use in hazardous areas the number of transmitters, which may be connected, is yet considerably higher, depending on the segment coupler.

There is a wide range of possibilities with respect to configuration like, for example, sensor type, sensor's mode of operation, scaling of the output signal and alarm limits are individually programmable. The configuration is made via a class 2 master and the definition of the profile in accordance with the Profibus guidelines. An appropriate tool for configuration is, for example, SIMATIC PDM or Freelance 2000.

High accuracy, galvanic isolation and excellent EMI protection are further features of these transmitters. The compact head mounting case fits in almost any DIN connecting head with form B.

The following sensors can be connected:

- RTDs per DIN IEC 751, JIS C 1606, DIN 43 760 in 2-, 3- and 4-lead connection, the connection-system used is configurable and ensures an optimal lead wire compensation
- thermocouples per DIN IEC 584 resp. DIN 43 710 Cold junction compensation (CJC) is built-in, the use of an external CJC is selectable via configuration.
- resistance-sensors up to 5000  $\Omega$  in 2-, 3- and 4-lead connection, configurable compensation of the connection cable
- mV-sensors up to 1200 mV

The variety of 15 sensor types enable registration of the temperature in a range from -270 °C up to 1820 °C.

The transmitters are delivered with a basic configuration. Alternatively, upon request, transmitters can be delivered with a customized configuration within the given limits.

## Specification

## Model T42.10.000 / T42.10.002 / T42.10.004

Input	configurable: type of sensor and measuring range		Masuring range
RTDs	Pt 100	DIN IEC 751	-200 ... + 850 °C <sup>1)</sup>
	JPt 100	JIS C 1606	-200 ... + 500 °C
	Ni 100	DIN 43760 : 1987-09	-60 ... + 250 °C
thermocouples	type T, Cu-CuNi	DIN IEC 584	-270 ... + 400 °C
	type E, NiCr-CuNi	DIN IEC 584	-270 ... +1000 °C
	type J, Fe-CuNi	DIN IEC 584	-210 ... +1200 °C
	type L, Fe-CuNi	DIN 43710 : 1985-12	-200 ... + 900 °C
	type K, NiCr-Ni	DIN IEC 584	-270 ... +1372 °C
	type N, NiCrSi-NiSi	DIN IEC 584	-270 ... +1300 °C
	type U, Cu-CuNi	DIN 43710 : 1985-12	-200 ... + 600 °C
	type R, PtRh-Pt	DIN IEC 584	-50 ... +1768 °C
	type S, PtRh-Pt	DIN IEC 584	-50 ... +1768 °C
resistance-sensor	type B, PtRh-PtRh	DIN IEC 584	0 ... +1820 °C
			0 ... 700 Ω
			0 ... 1400 Ω
			0 ... 2900 Ω
mV-sensor			0 ... 5000 Ω
			- 140 ... + 140 mV
			- 290 ... + 290 mV
			- 400 ... + 590 mV
			- 400 ... + 1200 mV
<b>RTDs / resistance-sensor</b>			
measuring deviation per DIN IEC 770, 23 °C ± 5 K			
RTDs	MV ≤ 200 °C	± 0.08 K	
	MV > 200 °C	± ( 0.08 K + 0.01 % (MV - 200 K) )	
resistance-sensor			
sensor current		± 0.03 Ω or 0.01 % MV , whichever is greater	
		approx. 0.2 mA	
temperature coefficient $T_c$	RTDs	± ( 0.05 K + 0.015 % MV ) / 10 K <sub>Tamb</sub>	
	resistance-sensor	± ( 0.01 Ω + 0.01 % MV ) / 10 K <sub>Tamb</sub>	
lead wire connection			
connection leads	effect	configurable: 2-lead , 3-lead , 4-lead	
	max. permissible resistance	± 0.02 Ω / 10 Ω	
		30 Ω each lead, 3-lead symmetric	
<b>thermocouples</b>			
measuring deviation per DIN IEC 770, 23 °C ± 5 K			
type T, L, U	-150 °C < MV ≤ 0 °C	± ( 0.25 K + 0.15 % MV )	
	MV > 0 °C	± ( 0.25 K + 0.015 % MV )	
E, J, K, N	-150 °C < MV ≤ 0 °C	± ( 0.4 K + 0.2 % MV )	
	MV > 0 °C	± ( 0.4 K + 0.03 % MV )	
R, S	50 °C < MV ≤ 400 °C	± ( 1.2 K + 0.1 % (MV - 400 K) )	
	400 °C < MV ≤ 1600 °C	± ( 1.2 K + 0.015 % (MV - 400 K) )	
B	400 °C < MV ≤ 1000 °C	± ( 1.3 K + 0.25 % (MV - 1000 K) )	
	MV > 1000 °C	± 1.3 K	
additional error of cold junction compensation at 23 °C ± 5 K		± 0.8 K	
temperature coefficient $T_c$			
type T, L, U	MV > -150 °C	± ( 0.1 K + 0.02 % MV ) / 10 K <sub>Tamb</sub>	
	MV > -150 °C	± ( 0.1 K + 0.035 % MV ) / 10 K <sub>Tamb</sub>	
E, J, K, N	50 °C < MV ≤ 1600 °C	± ( 0.3 K + 0.025 % (MV - 400 K) ) / 10 K <sub>Tamb</sub>	
	MV > 400 °C	± ( 0.4 K + 0.02 % (MV - 1000 K) ) / 10 K <sub>Tamb</sub>	
temperature coefficient $T_c$ of cold junction compensation		± 0.1 K / 10 K <sub>Tamb</sub>	
connection leads	effect	± 0.1 μV / 10 Ω	
	max. permissible resistance	250 Ω	
<b>mV-sensor</b>			
measuring deviation per DIN IEC 770, 23 °C ± 5 K		± ( 10 μV + 0.03 % MV )	
temperature coefficient $T_c$		± ( 2 μV + 0.03 % MV ) / 10 K <sub>Tamb</sub>	
connection leads	effect	± 0.1 μV / 10 Ω	
	max. permissible resistance	250 Ω	
<b>Communication</b>			
bus voltage		PROFIBUS PA , Profile 2.0	
model T42.10.000 (without Ex-protection)		EN 61158-2/94	
models T42.10.002 and T42.10.004 (with -protection)		DC 9 ... 32 V	
bus connection		DC 9 ... 25 V	
max. current consumption		reverse polarity possible	
default address		12.8 mA	
default address		126	



MV measuring value ( temperature measuring values in °C )

$T_{amb}$  ambient temperature

$T_c$  temperature coefficient

1) increased up to 1000 °C

<b>-protection</b>		EC Type Examination Certificate DMT 99 ATEX E 033 X					
model T42.10.002		II 1G EEx ia IIB / IIC	T4 / T5 / T6				
model T42.10.004	permissible ambient temperature	II 2G EEx ib IIB / IIC	T4 / T5 / T6				
		-50 °C ... +85 °C with T4					
		-50 °C ... +70 °C with T5					
		-50 °C ... +50 °C with T6					
maximum values for connection of the bus ( connections + and - )		$U_i = 25 \text{ V}$	$L_i = \text{negligible}$	$C_i = \text{negligible}$			
be suited to connect a power supply acc. to FISCO-Model with maximum values as listed		Power supply with trapezoid characteristic: $U_0 = 24 \text{ V}$	$I_0 = 250 \text{ mA}$	$P_0 = 1.2 \text{ W}$			
		Power supply with square wave characteristic: $U_0 = 17.5 \text{ V}$	$I_0 = 280 \text{ mA}$	$P_0 = 4.9 \text{ W}$			
maximum values for connection of the sensor circuit ( connections 1 up to 4 )		$U_o = 8.6 \text{ V}$	$I_o = 10 \text{ mA}$	$P_o = 22 \text{ mW}$			
		Group IIB: $C_o = 40 \mu\text{F}$		$L_o = 10 \text{ mH}$			
		Group IIC: $C_o = 5 \mu\text{F}$		$L_o = 10 \text{ mH}$			
<b>Electromagnetic compatibility (EMC)</b>	<b>CE</b> - Conformity per DIN EN 50081-1 (March 93) and DIN EN 50082-2 (February 96) NAMUR NE 21 (May 93)						
<b>Special features</b>							
isolation voltage (input versus bus connection)	AC 1500 V, 60 s						
ambient and storage temperature	standard range	-40 ... +85 °C					
	option: increased range	min. -50 °C max. +100 °C					
climate application class	GPA DIN 40040						
maximum permissible humidity	100 % relative humidity (unlimited with isolated connection wires), moisture condensation permissible DIN IEC 68-2-30 Var. 2						
vibration	10 ... 2000 Hz 5 g DIN IEC 68-2-6						
shock	DIN IEC 68-2-27 $g_N = 30$						
salt fog	DIN IEC 68-2-11						
warm-up time	approx. 5 Min.						
measured value update	approx. 2.5 / s						
temperature units	configurable: K, °C, °F, °R						
configuration and calibration data	permanently stored in EEPROM						
testing current to monitor sensor	nom. 1 µA during testing cycle, otherwise 0 µA						
self-monitoring	automatic execution of initial test after connection to power supply, thereafter monitoring due to internal malfunction						
guarantee	5 years for performance with standard range of ambient temperature, legal warranty with increased range of ambient temperature						
<b>Case</b>	head mounting design						
material	plastic						
ingress protection	case	IP 66 / IP 67 IEC 529 / EN 60529					
	terminal connections	IP 00 IEC 529 / EN 60529					
cross section of terminal connections	max. 2.5 mm², screws captive						
weight	approx. 70 g						
dimensions	see drawings						

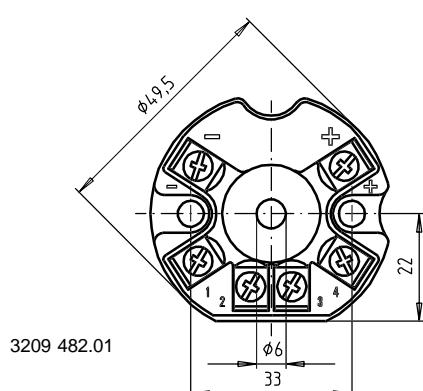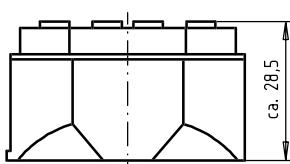
**Dimensions in mm**

3209 482.01


**Accessory****Mounting material**

- To use for mounting
- in the top of a connection head
- on a measuring insert, spring-loaded
- on a standard rail

## Designation of terminal connectors

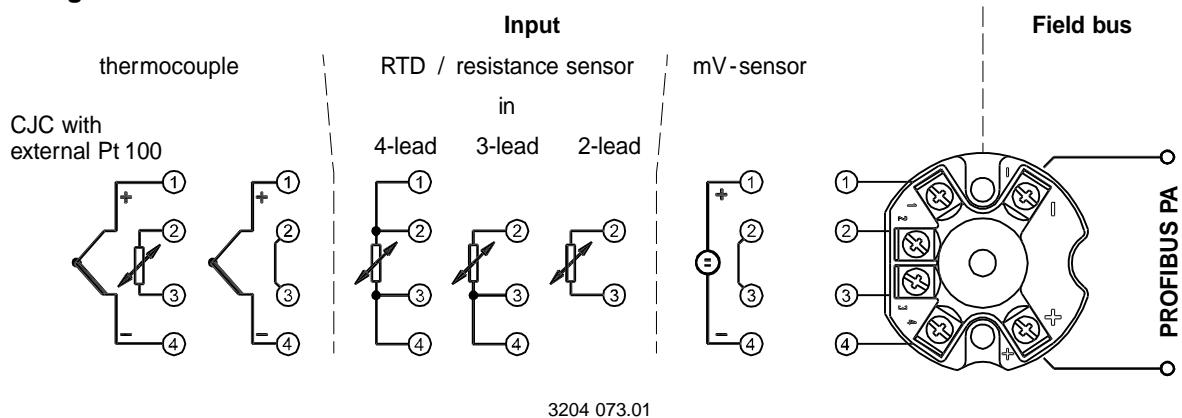

## Wiring scheme

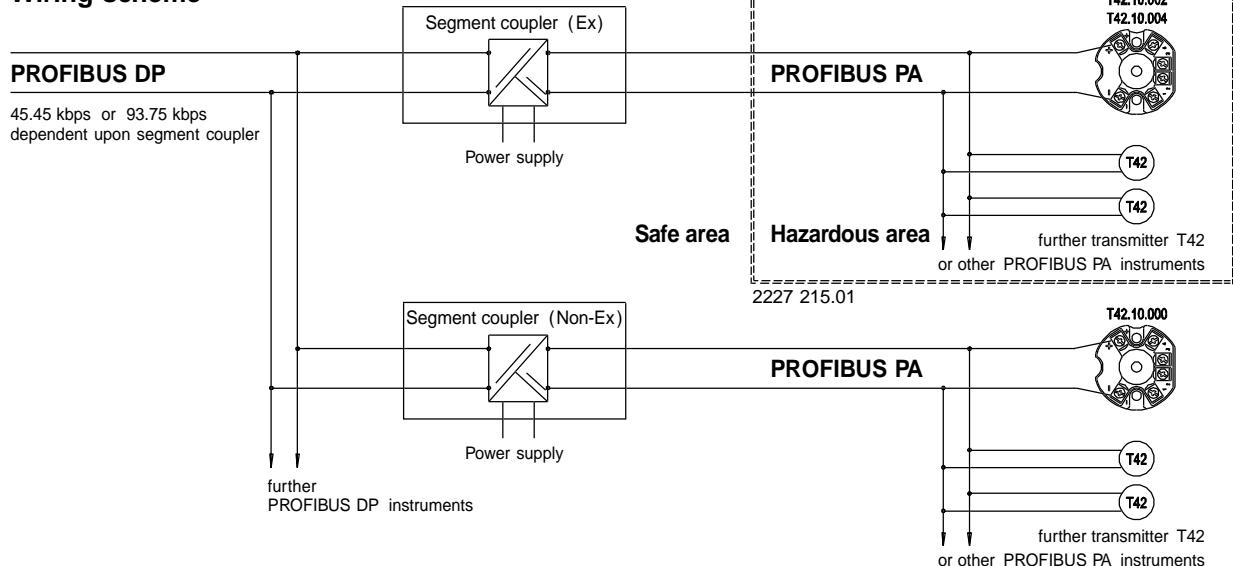

## Order code for temperature transmitter Model T42

Field No.	Code	Features	
1	<b>Explosion protection</b>		
	<b>0</b>	without	
	<b>2</b>	II 1G EEx ia IIC T4/T5/T6	
<b>4</b>	II 2G EEx ib IIC T4/T5/T6		
2	<b>Measuring range</b>		
	<b>PB</b>	basic configuration 1)	
<b>PK</b>	customer's specification 2)	please state as additional text	
3	<b>Additional order info</b>		
	<b>YES</b>	<b>NO</b>	
	<b>T</b>	<b>Z</b>	additional text

Please state as clearly understandable text !

- 1) Pt 100, 3 wire, 0 ... 150 °C
- 2) Please pay attention to the limits of measuring ranges on page 2.

### Order code:

T42.10	-	00	1	2	3
<input type="text"/> - <input type="text"/> - <input type="text"/>					

### Additional text:



INGENIEROS ASOCIADOS DE CONTROL S.L.

Telf.: 913831390  
comercial@iac-sl.es