

# Pressure Gauge Snubber

## Model 910.12

### Accessories, Mechanical

#### Service intended

Pressure gauge snubbers are intended to suppress the effect of pressure pulses and pressure peaks. The snubber is provided with an adjustable needle valve that enables to restrict the flow as operating conditions may demand even if the snubber is in service. The carefully adjusted snubber will considerably increase the service life of pressure gauges at arduous conditions such found at reciprocating pumps and compressors, hydraulic presses or fluid power systems and will additionally improve the reading accuracy of the fitted gauge.



#### Standard features

##### Pressure connection

G ½ male / female per EN 837-1 /7.3


| Body                 | Material             |          | PN [bar] | Temperature range | Product no. |
|----------------------|----------------------|----------|----------|-------------------|-------------|
|                      | Spindle              | Sealing  |          |                   |             |
| Brass                | 1.4104 <sup>2)</sup> | Perbunan | 250      | -10 ... 120 °C    | 90 90185    |
| Steel <sup>1)</sup>  | 1.4104 <sup>2)</sup> | Perbunan | 400      | -10 ... 120 °C    | 90 90193    |
| 1.4571 <sup>2)</sup> | 1.4571 <sup>2)</sup> | Viton    | 400      | -10 ... 120 °C    | 90 91262    |

1) rustproof

2) stainless steel

#### Optional extras

- Materials: chromed brass  
monel
- Connection: G ¼, G ⅜ per EN 837-1 /7.3  
M 20 x 1.5  
¼ NPT, ½ NPT
- Degreased for oxygen, max. 50 bar / +60 °C  
(for brass and stainless steel 1.4571 only)
- Material certificate per EN 10 204 / DIN 55 350-18

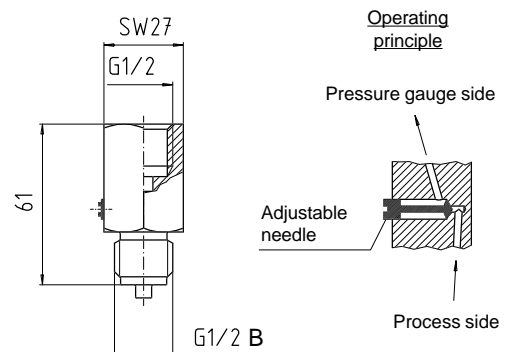

1035 436

#### Ordering information

To order the described product the 7-digit product number is sufficient. Options have to be named additional.



INGENIEROS ASOCIADOS DE CONTROL S.L.

Tel.: 913831390  
comercial@iac-sl.es